

# Brake Caliper DH 010 PFK

pneumatically activated – spring released



60-1


## Features

Features	Code
Brake Caliper	D
Mounting to the machine at right angles to the brake disc	H
Frame size 010	010
Pneumatically activated	P
Spring released	F
No adjustment to accommodate friction block wear	K
Pressure piston 610	610
Pressure piston mounted in central position	M
Thickness of brake disc 12,5 mm	12

## Example for ordering


Brake Caliper DH 010 PFK, pressure piston 610, pressure piston mounted in central position, thickness of brake disc 12,5 mm:

DH 010 PFK - 610 M - 12

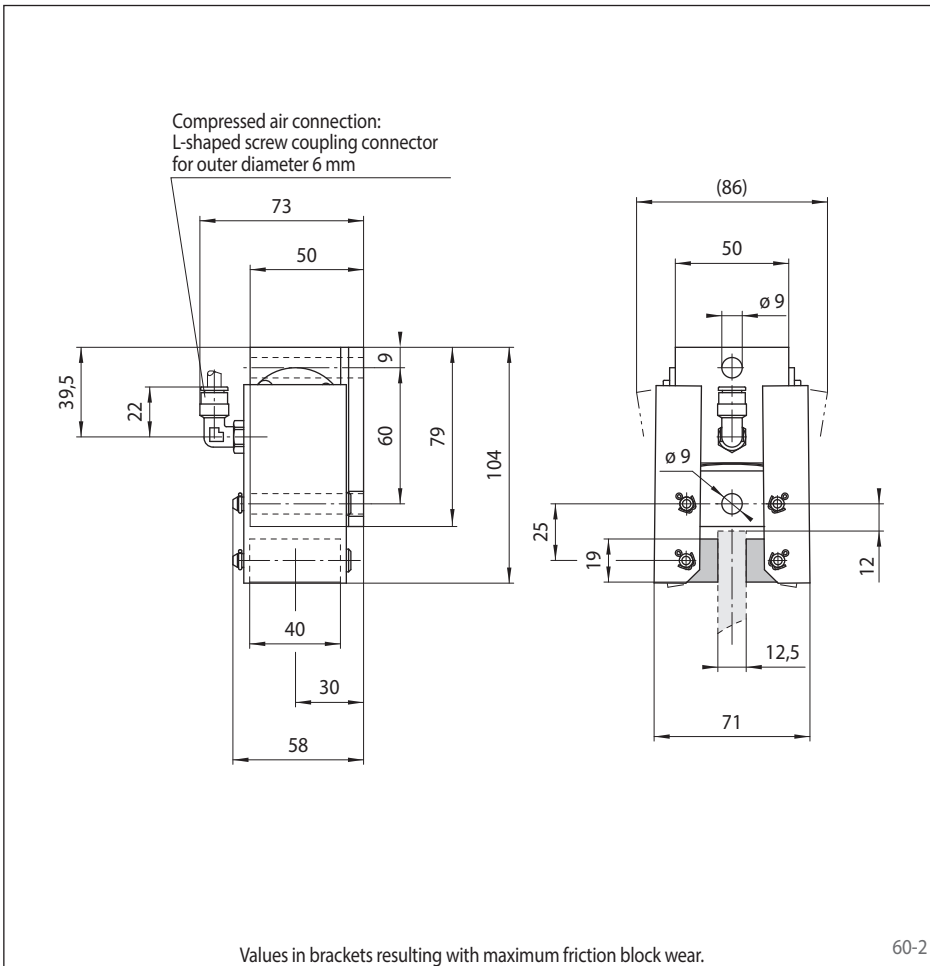

60-2

## Technical Data

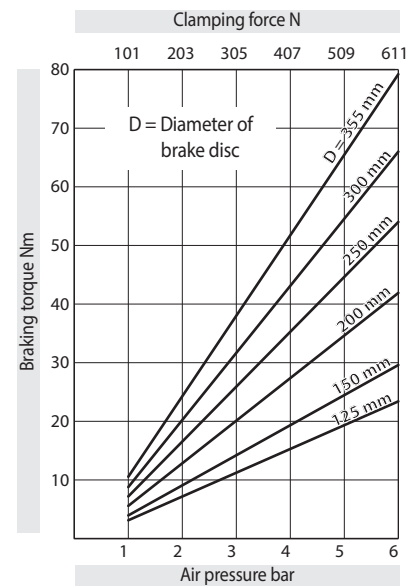

The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.

Air pressure: max. 6 bar

Air volume: max. 10 cm<sup>3</sup> per activation

Weight: 1,1 kg