


Brake Caliper DV 035 PFM

pneumatically activated – spring released

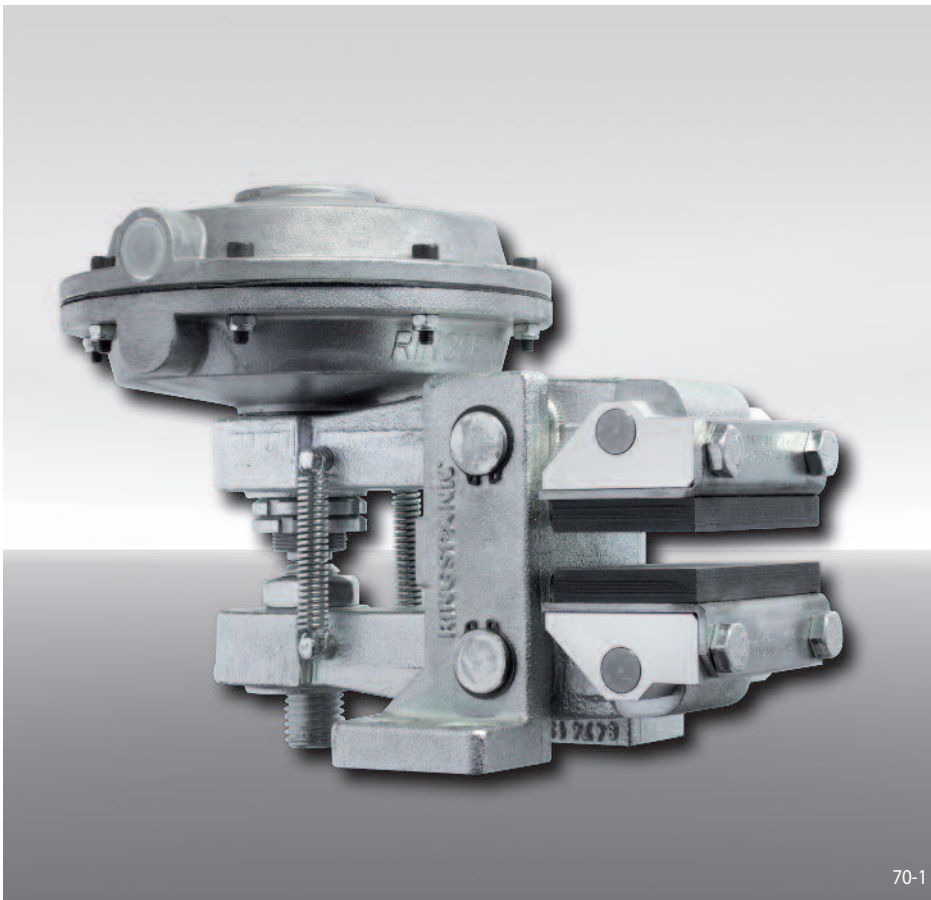

Features

Features	Code
Brake Caliper	D
Mounting to the machine parallel to the brake disc	V
Frame size 035	035
Pneumatically activated	P
Spring released	F
Manual adjustment to accommodate friction block wear	M
Thrusters 635, 655 or 660 are available	635 655 660
Thruster mounted right available	R
Thickness of brake disc 12,5 mm, 25 mm, 30 mm or 40 mm	12 to 40


Example for ordering

Brake Caliper DV 035 PFM, thruster 660, thruster mounted right, thickness of brake disc 12,5 mm:

DV 035 PFM - 660 R - 12

Technical Data


Brake Caliper DV 035 PFM - 635

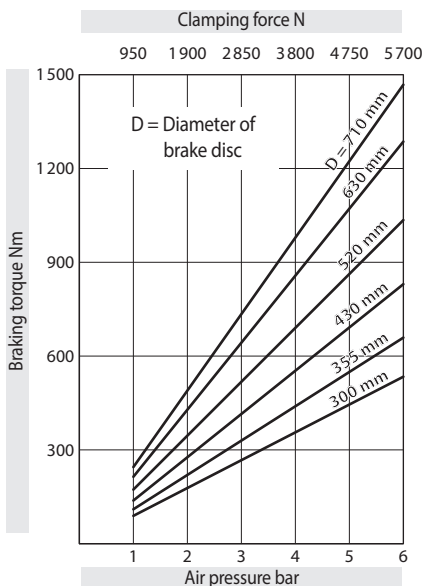

The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.

- Air pressure: max. 6 bar
- Air volume: max. 175 cm³ per activation
- Weight: 9,1 kg


Brake Caliper DV 035 PFM - 655

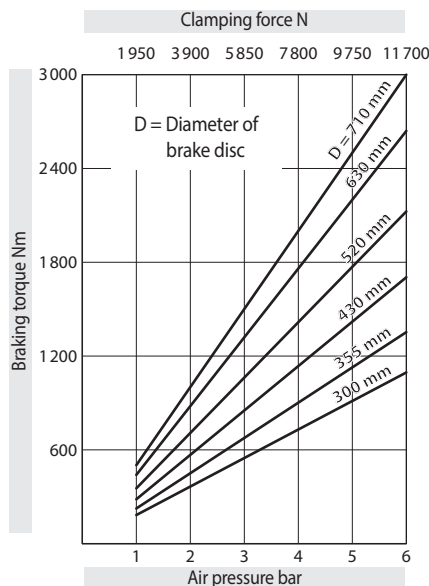

The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.

- Air pressure: max. 6 bar
- Air volume: max. 740 cm³ per activation
- Weight: 12,3 kg

Brake Caliper DV 035 PFM - 660

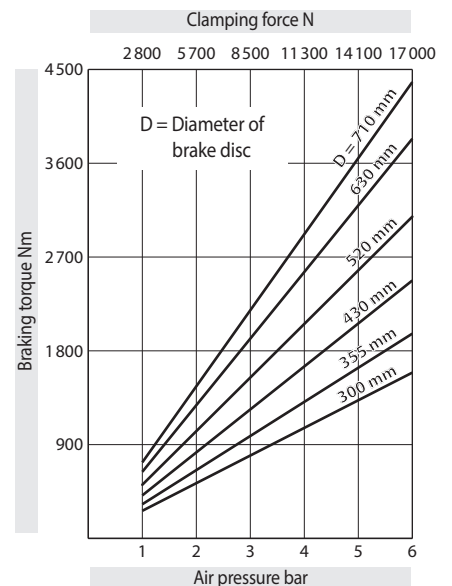

The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.

- Air pressure: max. 6 bar
- Air volume: max. 450 cm³ per activation
- Weight: 11,4 kg

Brake Caliper DV 035 PFM

pneumatically activated – spring released

