

### Brake Caliper HW 075 HFK

### hydraulically activated - spring released

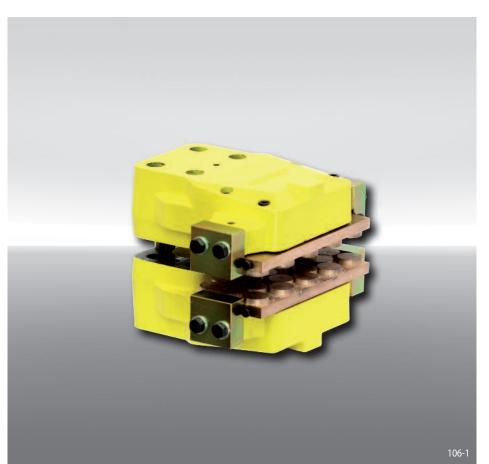

### **Technical Data**

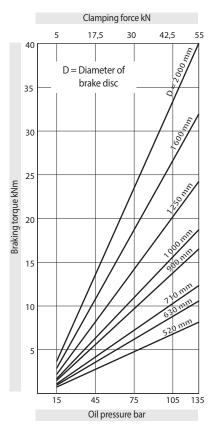

Oil pressure: Oil volume: Weight: min. 15 bar max. 125 bar max. 75 cm<sup>3</sup> ca. 60 kg

### Code **Features** Brake Caliper Н Standard W With piston diameter 75 mm 075 Hydraulically activated Н F Spring released No adjustment to Κ accommodate friction block wear Max. clamping force 55 kN 055 **Example for ordering**

Brake Caliper HW 075 HFK, max. clamping force 55 kN:

HW 075 HFK - 055

### **Other features**

- High safety against leakage
- Easy change of friction blocks
- Painted with surface coating class C4-L according to ISO 12944
- The thickness of the customer connecting part results from the thickness of the brake disc W plus 3 mm

#### Accessories

- Inductive proximity switch for "brake released" operating status
- Optional painting with surface coating class C4-H or C5M-H (offshore) according to ISO 12944


The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.

## **RINGSPANN®**

## Brake Caliper HW 075 HFK

# **RINGSPANN®**

### hydraulically activated – spring released

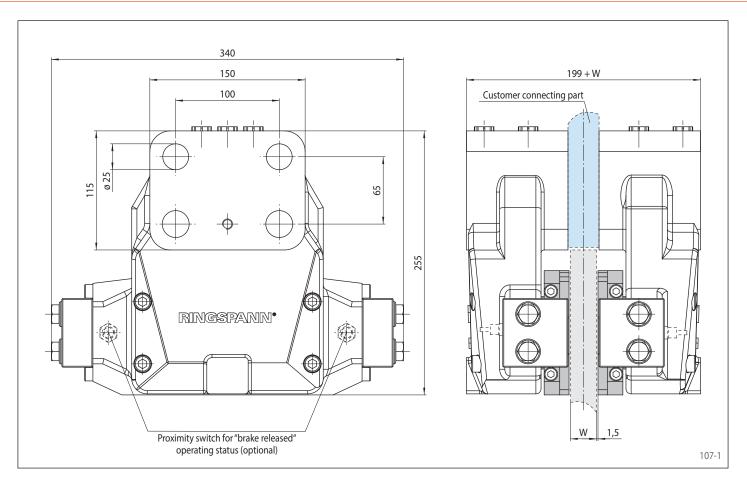

### Mounting

