

40A Model LS



Lever Operated Limit Switches

Introduction


Lever Type Limit Switch operates the control change-over contacts of motor of an moving equipments when a cam moving with loads actuates the lever of Limit Switch. This turns the cam on a square shaft and operate the NO/NC change over contact elements.

Technical Data :

Body Material	Alluminium Die Cast (Powder Coated)
Protection Degree	IP-55 Confirming to IS- 13947 (Part)-1993
Mounting Position	Floor
Cable Entries	2, 3/4" Conduit
No. O Contacts	2 NC
Contact Material	Silver Cadmium
Wire Connection	Screw Terminal
Rated valtage	500 V.A.C. Max
Thermal Test	40 A

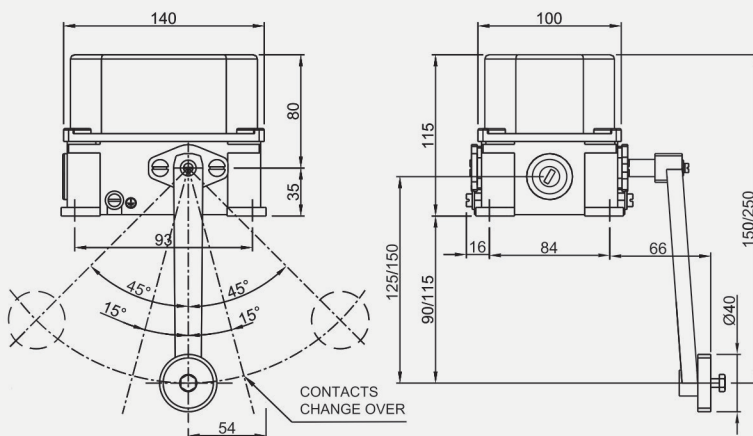

MOUNTING DIMENSIONS

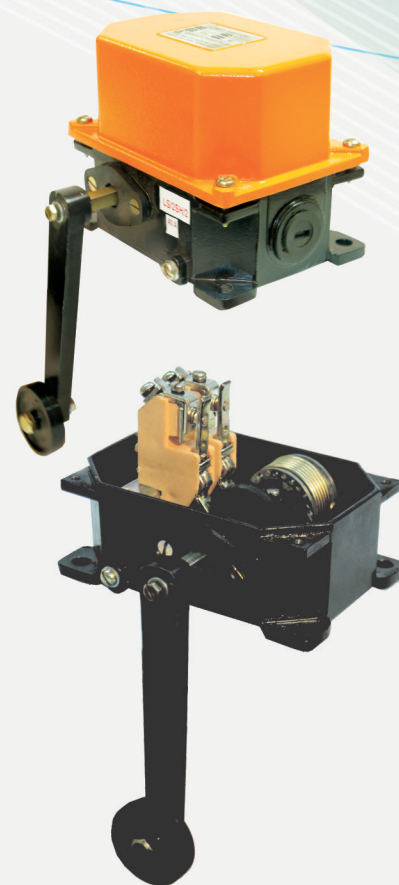

SWITCHING DIAGRAM

LS/1SH/1
101300020001

CONTACT NO.	F	O	R
1		X	

LS/1SH/2
101300012002

CONTACT NO.	F	O	R
1		X	
2		X	

LS/1SH/11
101300012003

CONTACT NO.	F	O	R
1		X	
2			

LS/2SH/2
101300020004

CONTACT NO.	F	O	R
1	X	X	
2		X	X



Speed-O-Controls Pvt. Ltd.

H. O. Unit - I : C-15/16, Nand Jyot Industrial Estate,
Andheri-Kurla Road, Mumbai - 400072 ,
Tel : (022) 42469700-30, 28518512-3-4,
Fax : (022) 42469797/ 28518516,
E-mail : sales@socgroup.in

Unit - II: Plot No. 4912, G. I. D. C., Phase IV,
Vatva, Ahmedabad - 382445
Tel.: (079) 40083201/2/3/4,
Fax : (079) 25841056,
E-mail : sales.amd@socgroup.in

Visit us at :
www.speedocontrols.com
www.socremote.com